


# Resin

# YD - 300

YD - 300

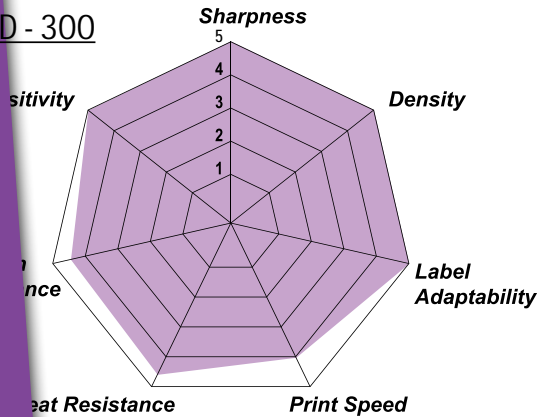

This resin TTR has the top all-around attributes. Along with its brilliant printing performance, it has the best label adaptability as well; it's suitable for a wide range of the synthetic substrates.

## TTR Properties

Total Thickness	6.9 ± 0.3 um
Ink Thickness	2.4 ± 0.2 um
Ink Melting Point	100°C
Static	≤ 0.02 kv
Available Color	■
Printing speed	up to 12ips
Compatible Printers	Zebra, Sato, Intermec, TSC, Datamax, Avery, CAB, Argon, Toshiba TEC, ect

### Recommended Substrates

Coated  
PAPERS

Polyester  
SYNTHETICS

PP  
SYNTHETICS

PS  
SYNTHETICS

PVC  
SYNTHETICS

PE  
SYNTHETICS

PET  
SYNTHETICS

## Recommended Applications

General purpose labeling	Warehouse & logistics
Retails labeling	Pharmaceutical
Shelf & Bin labeling	Electronics
Healthcare	Chemical

