


# Wax Resin

# YD - 211

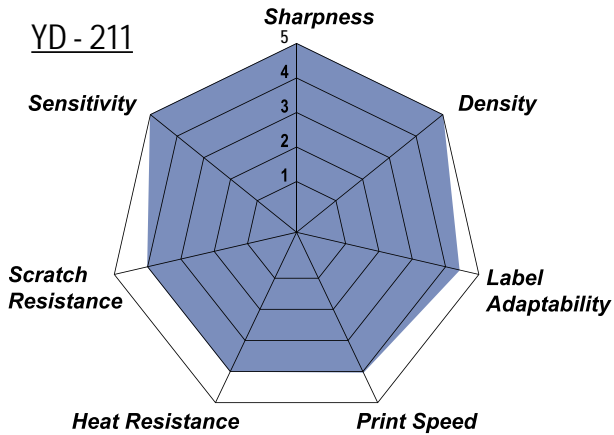

It offers the superior performance with the sharp and clean definition. It's the ideal choice when an extra durability is required for the printed image.

## TTR Properties

Total Thickness	7.1 ± 0.3 um
Ink Thickness	2.6 ± 0.2 um
Ink Melting Point	80°C
Static	≤ 0.03 kv
Available Color	
Printing speed	up to 12ips
Compatible Printers	Zebra, Sato, Intermec, TSC, Datamax, Avery, CAB, Argon, Toshiba TEC, ect

### Recommended Substrates



## Recommended Applications

General purpose labeling	Warehouse & logistics
Retails labeling	Pharmaceutical
Shelf & Bin labeling	Electronics
Healthcare	

